




Sentry V2 – Mass Flow Meter

SKU: GQ-SENTRY-V2



The Sentry SF6 Mass Flow Meter is a portable, field-ready tool for accurate SF6 gas measurement during breaker filling. Featuring a Coriolis sensor and simple interface, it simplifies reporting, eliminates heavy lifting, and meets EPA/CARB standards—ideal for utility and industrial use.

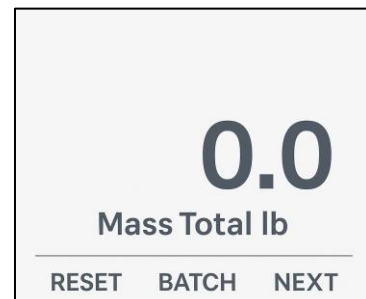

NO LIFTING HEAVY CYLINDERS

When your device needs calibration, sensor modules are sent to swap in, and you have no down time as a result.

SIMPLE INTERFACE

Measurements on SF6, SO2, and moisture that you can trust. Advanced sensors coupled high purity components ensure reliability for years to come.

PRECISE MASS MEASUREMENTS

The simplified touch screen interface makes operation painless. A high contrast display allows for use in the brightest environments.



General	
Device Dimensions	<i>10.75" x 8.75" x 4.25"</i>
Weight	<i>6lbs</i>
Inlet Pressure	<i>Up to 1000 PSI</i>
Operating Temperature	<i>0-60°C</i>
Boot up Time	<i>1 Second</i>
Input Connection	<i>CGA 590</i>
Output Connection	<i>DN8 Male or Customer Specified</i>
Case Type	<i>Pelican Vault V200C</i>
Accuracy	<i>±0.01 lbs</i>
Calibration Interval	<i>At Customer's Discretion</i>
Shipping Information	
Package Dimensions	<i>15.5" x 13" x 6.25"</i>
Package Weight	<i>12lbs</i>



**CORPORATE
HEADQUARTERS**
GasQuip LLC
11400 Suite 404
College Station, TX 77845
USA

gasquip.com

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2023 GASQUIP LLC Systems, Inc. All rights reserved. 02/23